

KA

Construction

- Two specially drawn brass extrusions joined by brazing
- Pressure finger actuated by a stainless steel clock spring
- Nylon bearings

Special Features


- Adjustable spring tension by five position lever
- Hold off position engaged by pressure on the thumb trigger and release bt lifting

Finish

- Tin plate

Alternative fixing/slot details available on request.

Limited quantities are normally available from stock.

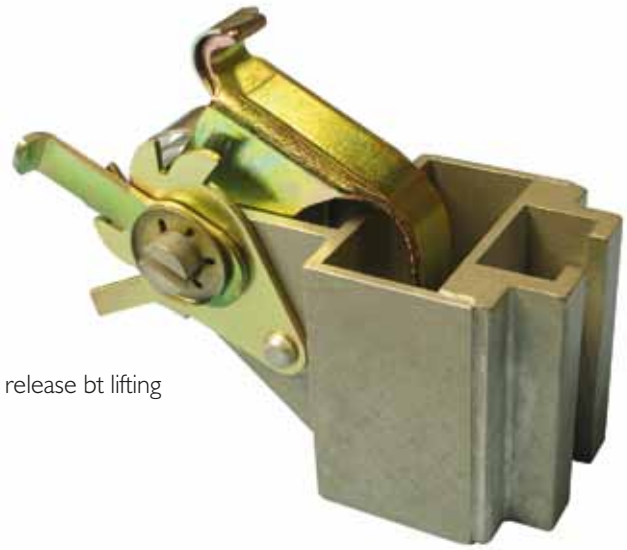

Part No.	Holder Type	Nominal Dimensions (mm)				Imperial/Metric	'U' Throw (Fixing) Dimensions (mm)	Spring Load (gf)	Serrated (Y/N)	No. Pockets	Fabricated/Cast
		t	a	Box Height	Brush Length						
KA1206M/3004	KA	10.00	20.00	25.40	32.00	Metric	9.52	280-374	N	I	Fabricated
KA1206M/3005	KA	10.00	20.00	23.00	30.00	Metric	9.70	390	Y	I	Fabricated
KA1608M/3006	KA	12.50	25.00	32.00	40.00	Metric	10.00	454	N	I	Fabricated
KA1608M/3007	KA	12.50	25.00	32.00	40.00	Metric	10.00	454	Y	I	Fabricated
KA1610M/3003	KA	16.00	25.00	32.00	38.00	Metric	9.52	567	N	I	Fabricated
KA1610M/3007	KA	16.00	25.00	32.00	38.00	Metric	9.52	567	Y	I	Fabricated
KA1612M/3007	KA	20.00	25.00	32.00	38.00	Metric	9.52	680	Y	I	Fabricated
KA1612M/3008	KA	20.00	25.00	32.00	38.00	Metric	9.52	680	N	I	Fabricated
KA2005M/3003	KA	8.00	32.00	32.00	38.00	Metric	10.00	340	N	I	Fabricated
KA2006M/3005	KA	10.00	32.00	30.00	35.00	Metric	10.00	426	N	I	Fabricated
KA2008M/3010	KA	12.50	32.00	38.10	45.00	Metric	14.73	567	N	I	Fabricated
KA2008M/3011	KA	12.50	32.00	38.10	45.00	Metric	14.73	567	Y	I	Fabricated
KA2008M/3013	KA	12.50	32.00	38.10	45.00	Metric	10.00	567	Y	I	Fabricated
KA2010M/3018	KA	16.00	32.00	38.10	45.00	Metric	10.70	708	N	I	Fabricated
KA2010M/3009	KA	16.00	32.00	30.00	38.00	Metric	14.73	1008	Y	I	Fabricated
KA2010M/3010	KA	16.00	32.00	38.10	45.00	Metric	14.73	708	N	I	Fabricated
KA2010M/3014	KA	16.00	32.00	38.10	45.00	Metric	14.73	708	Y	I	Fabricated
KA2010M/3015	KA	16.00	32.00	38.10	45.00	Metric	10.00	708	Y	I	Fabricated
KA2012M/3008	KA	20.00	32.00	38.10	45.00	Metric	14.73	850	Y	I	Fabricated
KA2012M/3010	KA	20.00	32.00	38.10	45.00	Metric	14.73	850	N	I	Fabricated
KA2016M/3007	KA	25.00	32.00	38.10	45.00	Metric	14.73	950	Y	I	Fabricated
KA2016M/3010	KA	25.00	32.00	38.10	45.00	Metric	14.86/14.60	950	N	I	Fabricated
KA2016M/3011	KA	25.00	32.00	38.10	45.00	Metric	12.00	950	N	I	Fabricated

PTO

KA

Finger in hold off position

